

## ON-BOARD PROCESSING AND DIGITAL RF TRANSCEIVER DEVELOPMENT KITS

*A Trident development platform with lab-standard interfaces utilizing flight-like hardware. Pre-loaded with Trident Firmware and Software for application development and testing. On-site and remote support available with each kit.*

### Customizable Development Kits

Trident UDRT Development Kits are lab-based development platforms, preloaded with Trident FW/SW (source files included), for application development, testing, and HWIL demonstrations on Trident Hardware. Compatible with Tridents 3U VPX modules, the kits provide operational and developmental interfaces to flight-like hardware with "lab-friendly" interfaces. These kits are a low-cost, rapidly available platform for new and existing customers. Customization available.


### Rapid Response Methodology

Development Kits are an integral part of Trident's Rapid Response methodology which enable our customers success on fast-paced, cost constrained, modern space programs. Demonstrated on multiple flight programs, contact us to learn how we can apply this methodology to your programs.



Lab Development on  
Trident Flight-Like  
Hardware

# SPN-05007 UDRT DEV KIT SPECIFICATIONS

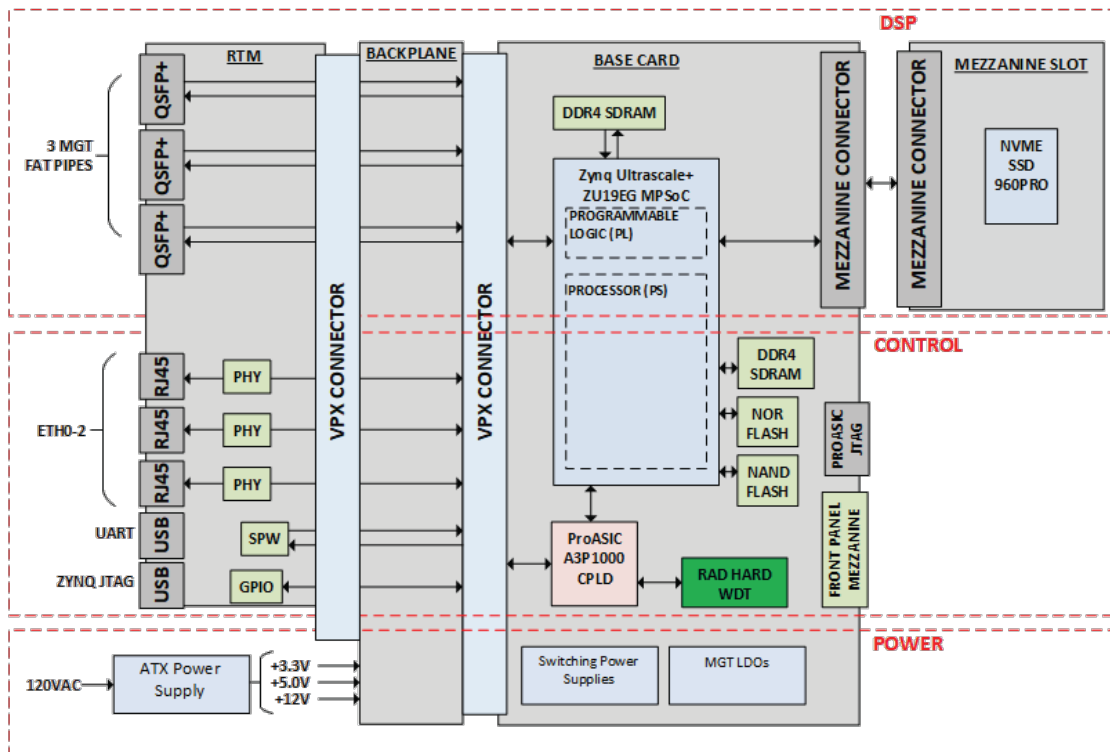

## SPN-05007 UDRT DevKit Specifications

- Integrated UDRT EDU with XQZU19EG-1FFRC1760M in LVAUX mode with flight and developmental interfaces
  - 4 GB PL and 4 GB PS DDR4 Memory
  - 1 GB NAND Flash, 128 MB Redundant NOR Flash
  - Two Zynq-PS Ethernet (RJ45)
  - Zynq GTY Quad (QSFP+)
  - Two (2) Zynq UART connections (USB)
  - Zynq/ProASIC JTAG (USB, integrated Pod)
  - 1 Pulse Per Second (SMA)
  - Discrete boot and power control
  - Includes 1 TB SSD on mezzanine site



## Included Source Files and Docs

- Trident Yocto Layer BSP
- Zynq processor configurations (TCL)
- Zynq Programmable Logic SDRAM setup (XCI)
- MGT setup constrained by REF CLKs (XCI)
- Pin constraints for the entire chip (XDC)
- Example Project/Bitstreams
- Engineering GUI and C2 GUI for Flight SW
- Library and HW User Manual and Documentation

## SWaP

- Benchtop or 19" rack-mountable (3U height)
- 120 VAC (Integrated Power Supply)
- ~8 kg, shipped in protective storage container

## Rapid Availability

- From stock to 14-16 weeks
- On-site and remote support included
- Kit Customization is available for interfaces and other mezzanine cards

Contact Us: [SES-BD@tridsys.com](mailto:SES-BD@tridsys.com)